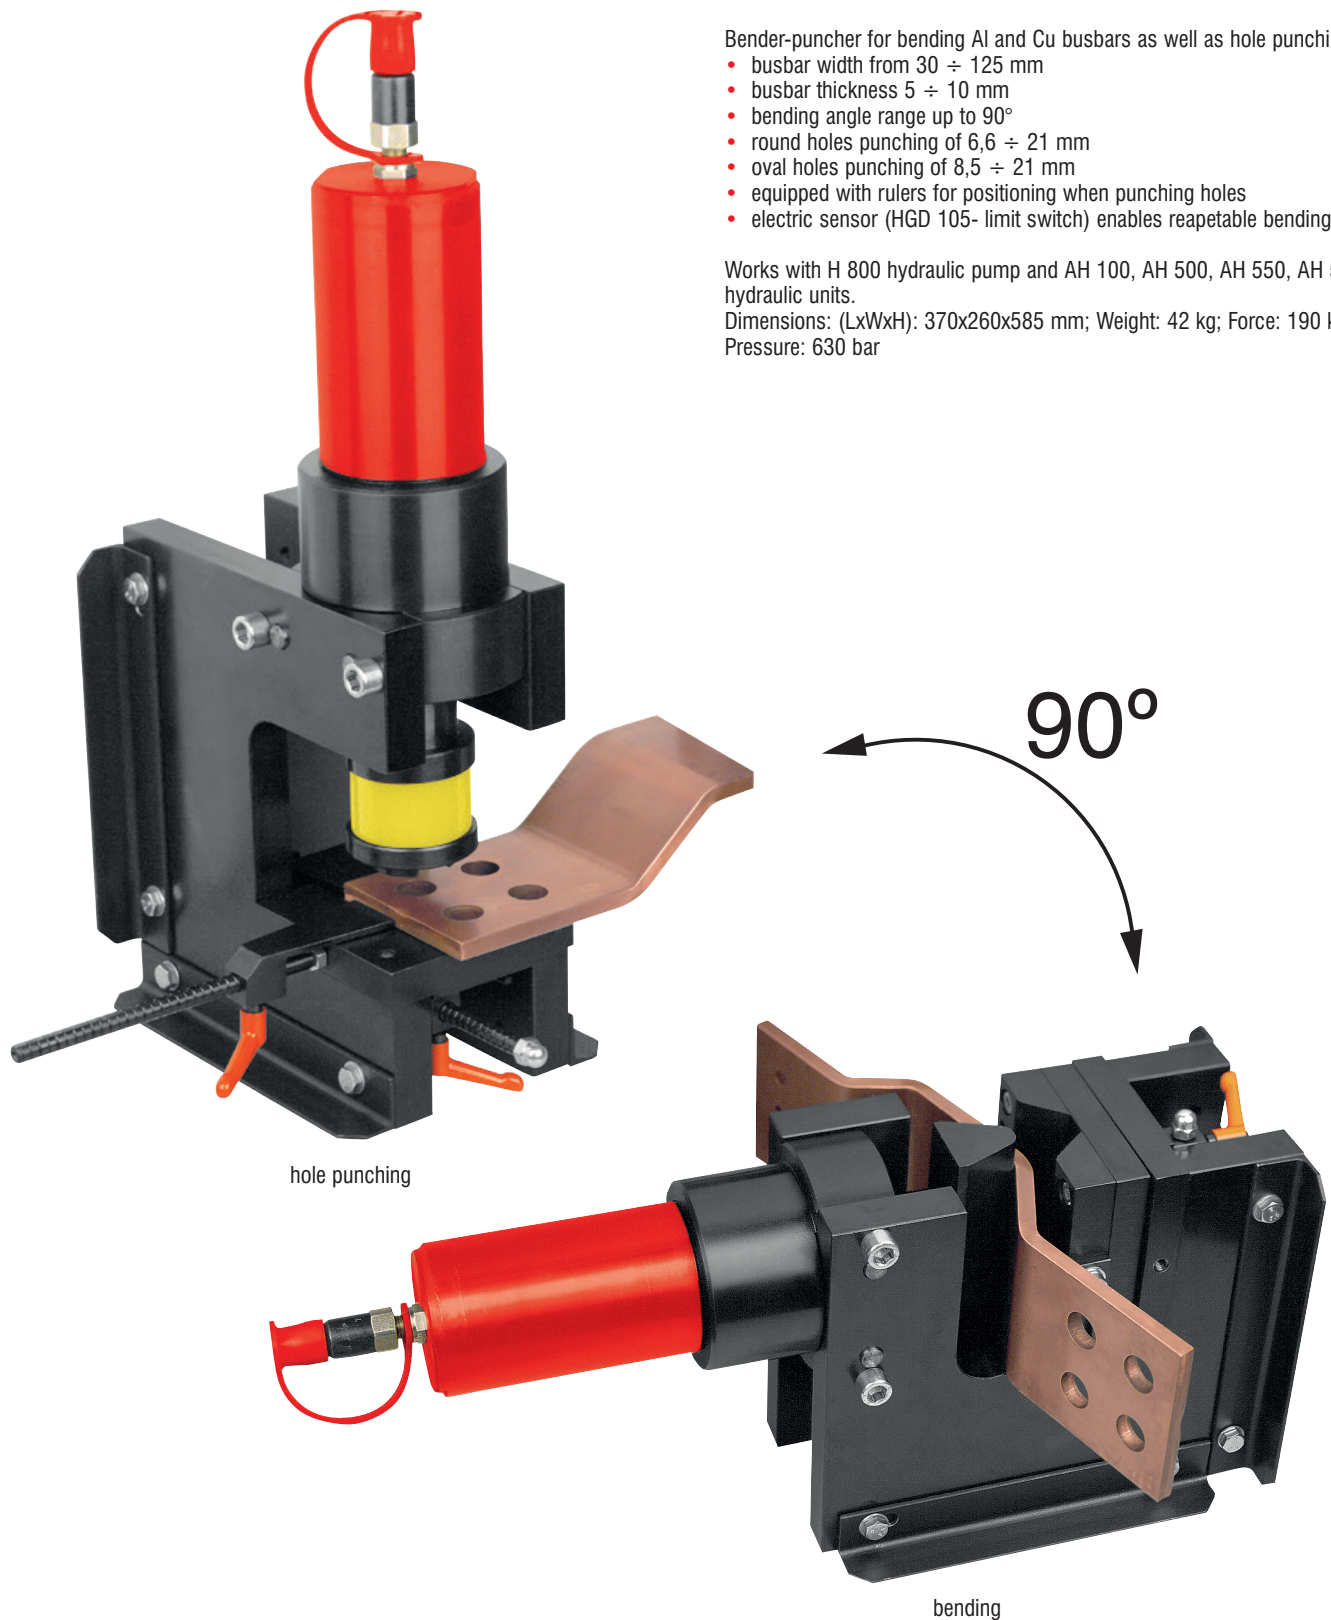


HGD 125 Bender – puncher

Bender-puncher for bending Al and Cu busbars as well as hole punching:

- busbar width from 30 ÷ 125 mm
- busbar thickness 5 ÷ 10 mm
- bending angle range up to 90°
- round holes punching of 6,6 ÷ 21 mm
- oval holes punching of 8,5 ÷ 21 mm
- equipped with rulers for positioning when punching holes
- electric sensor (HGD 105- limit switch) enables repeatable bending

Works with H 800 hydraulic pump and AH 100, AH 500, AH 550, AH 500L hydraulic units.

Dimensions: (LxWxH): 370x260x585 mm; Weight: 42 kg; Force: 190 kN
Pressure: 630 bar